CollegeBoard
Advanced Placement Program

AP® Physics C: Electricity and Magnetism
2010 Free-Response Questions

TABLE OF INFORMATION FOR 2010 and 2011

CONSTANTS AND CONVERSION FACTORS			
Proton mass,	$m_p = 1.67 \times 10^{-27}$ kg	Electron charge magnitude,	$e = 1.60 \times 10^{-19}$ C
Neutron mass,	$m_n = 1.67 \times 10^{-27}$ kg	1 electron volt,	$1\text{ eV} = 1.60 \times 10^{-19}$ J
Electron mass,	$m_e = 9.11 \times 10^{-31}$ kg	Speed of light,	$c = 3.00 \times 10^8$ m/s
Avogadro's number,	$N_0 = 6.02 \times 10^{23}$ mol^{-1}	Universal gravitational constant,	$G = 6.67 \times 10^{-11}$ m^3/kg•s^2
Universal gas constant,	$R = 8.31$ J/(mol•K)	Acceleration due to gravity at Earth's surface,	$g = 9.8$ m/s^2
Boltzmann's constant,	$k_B = 1.38 \times 10^{-23}$ J/K		

1 unified atomic mass unit,	$1\text{ u} = 1.66 \times 10^{-27}$ kg $= 931$ MeV/c^2
Planck's constant,	$h = 6.63 \times 10^{-34}$ J•s $= 4.14 \times 10^{-15}$ eV•s
	$hc = 1.99 \times 10^{-25}$ J•m $= 1.24 \times 10^3$ eV•nm
Vacuum permittivity,	$\epsilon_0 = 8.85 \times 10^{-12}$ C^2/N•m^2
Coulomb's law constant,	$k = 1/4\pi\epsilon_0 = 9.0 \times 10^9$ N•m^2/C^2
Vacuum permeability,	$\mu_0 = 4\pi \times 10^{-7}$ (T•m)/A
Magnetic constant,	$k' = \mu_0/4\pi = 1 \times 10^{-7}$ (T•m)/A
1 atmosphere pressure,	$1\text{ atm} = 1.0 \times 10^5$ N/m^2 $= 1.0 \times 10^5$ Pa

UNIT SYMBOLS								
	meter,	m	mole,	mol	watt,	W	farad,	F
	kilogram,	kg	hertz,	Hz	coulomb,	C	tesla,	T
	second,	s	newton,	N	volt,	V	degree Celsius,	°C
	ampere,	A	pascal,	Pa	ohm,	Ω	electron-volt,	eV
	kelvin,	K	joule,	J	henry,	H		

PREFIXES

Factor	Prefix	Symbol
10^9	giga	G
10^6	mega	M
10^3	kilo	k
10^{-2}	centi	c
10^{-3}	milli	m
10^{-6}	micro	μ
10^{-9}	nano	n
10^{-12}	pico	p

VALUES OF TRIGONOMETRIC FUNCTIONS FOR COMMON ANGLES

θ	$0°$	$30°$	$37°$	$45°$	$53°$	$60°$	$90°$
$\sin\theta$	0	$1/2$	$3/5$	$\sqrt{2}/2$	$4/5$	$\sqrt{3}/2$	1
$\cos\theta$	1	$\sqrt{3}/2$	$4/5$	$\sqrt{2}/2$	$3/5$	$1/2$	0
$\tan\theta$	0	$\sqrt{3}/3$	$3/4$	1	$4/3$	$\sqrt{3}$	∞

The following conventions are used in this exam.

I. Unless otherwise stated, the frame of reference of any problem is assumed to be inertial.

II. The direction of any electric current is the direction of flow of positive charge (conventional current).

III. For any isolated electric charge, the electric potential is defined as zero at an infinite distance from the charge.

ADVANCED PLACEMENT PHYSICS C EQUATIONS FOR 2010 and 2011

MECHANICS

$\upsilon = \upsilon_0 + at$

$x = x_0 + \upsilon_0 t + \frac{1}{2}at^2$

$\upsilon^2 = \upsilon_0^2 + 2a(x - x_0)$

$\sum \mathbf{F} = \mathbf{F}_{net} = m\mathbf{a}$

$\mathbf{F} = \frac{d\mathbf{p}}{dt}$

$\mathbf{J} = \int \mathbf{F}\, dt = \Delta \mathbf{p}$

$\mathbf{p} = m\mathbf{v}$

$F_{fric} \le \mu N$

$W = \int \mathbf{F} \cdot d\mathbf{r}$

$K = \frac{1}{2}m\upsilon^2$

$P = \frac{dW}{dt}$

$P = \mathbf{F} \cdot \mathbf{v}$

$\Delta U_g = mgh$

$a_c = \frac{\upsilon^2}{r} = \omega^2 r$

$\boldsymbol{\tau} = \mathbf{r} \times \mathbf{F}$

$\sum \boldsymbol{\tau} = \boldsymbol{\tau}_{net} = I\boldsymbol{\alpha}$

$I = \int r^2 dm = \sum mr^2$

$\mathbf{r}_{cm} = \sum m\mathbf{r} / \sum m$

$\upsilon = r\omega$

$\mathbf{L} = \mathbf{r} \times \mathbf{p} = I\boldsymbol{\omega}$

$K = \frac{1}{2}I\omega^2$

$\omega = \omega_0 + \alpha t$

$\theta = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2$

a = acceleration
F = force
f = frequency
h = height
I = rotational inertia
J = impulse
K = kinetic energy
k = spring constant
ℓ = length
L = angular momentum
m = mass
N = normal force
P = power
p = momentum
r = radius or distance
$\mathbf{r}$ = position vector
T = period
t = time
U = potential energy
υ = velocity or speed
W = work done on a system
x = position
μ = coefficient of friction
θ = angle
τ = torque
ω = angular speed
α = angular acceleration

$\mathbf{F}_s = -k\mathbf{x}$

$U_s = \frac{1}{2}kx^2$

$T = \frac{2\pi}{\omega} = \frac{1}{f}$

$T_s = 2\pi\sqrt{\frac{m}{k}}$

$T_p = 2\pi\sqrt{\frac{\ell}{g}}$

$\mathbf{F}_G = -\frac{Gm_1 m_2}{r^2}\hat{\mathbf{r}}$

$U_G = -\frac{Gm_1 m_2}{r}$

ELECTRICITY AND MAGNETISM

$F = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2}{r^2}$

$\mathbf{E} = \frac{\mathbf{F}}{q}$

$\oint \mathbf{E} \cdot d\mathbf{A} = \frac{Q}{\epsilon_0}$

$E = -\frac{dV}{dr}$

$V = \frac{1}{4\pi\epsilon_0}\sum_i \frac{q_i}{r_i}$

$U_E = qV = \frac{1}{4\pi\epsilon_0}\frac{q_1 q_2}{r}$

$C = \frac{Q}{V}$

$C = \frac{\kappa \epsilon_0 A}{d}$

$C_p = \sum_i C_i$

$\frac{1}{C_s} = \sum_i \frac{1}{C_i}$

$I = \frac{dQ}{dt}$

$U_c = \frac{1}{2}QV = \frac{1}{2}CV^2$

$R = \frac{\rho \ell}{A}$

$\mathbf{E} = \rho \mathbf{J}$

$I = Nev_d A$

$V = IR$

$R_s = \sum_i R_i$

$\frac{1}{R_p} = \sum_i \frac{1}{R_i}$

$P = IV$

$\mathbf{F}_M = q\mathbf{v} \times \mathbf{B}$

A = area
B = magnetic field
C = capacitance
d = distance
E = electric field
$\mathcal{E}$ = emf
F = force
I = current
J = current density
L = inductance
ℓ = length
n = number of loops of wire per unit length
N = number of charge carriers per unit volume
P = power
Q = charge
q = point charge
R = resistance
r = distance
t = time
U = potential or stored energy
V = electric potential
υ = velocity or speed
ρ = resistivity
ϕ_m = magnetic flux
κ = dielectric constant

$\oint \mathbf{B} \cdot d\boldsymbol{\ell} = \mu_0 I$

$d\mathbf{B} = \frac{\mu_0}{4\pi}\frac{I\, d\boldsymbol{\ell} \times \mathbf{r}}{r^3}$

$\mathbf{F} = \int I\, d\boldsymbol{\ell} \times \mathbf{B}$

$B_s = \mu_0 nI$

$\phi_m = \int \mathbf{B} \cdot d\mathbf{A}$

$\mathcal{E} = \oint \mathbf{E} \cdot d\boldsymbol{\ell} = -\frac{d\phi_m}{dt}$

$\mathcal{E} = -L\frac{dI}{dt}$

$U_L = \frac{1}{2}LI^2$

GEOMETRY AND TRIGONOMETRY

Rectangle

$A = bh$

Triangle

$A = \frac{1}{2}bh$

Circle

$A = \pi r^2$

$C = 2\pi r$

Parallelepiped

$V = \ell wh$

Cylinder

$V = \pi r^2 \ell$

$S = 2\pi r\ell + 2\pi r^2$

Sphere

$V = \frac{4}{3}\pi r^3$

$S = 4\pi r^2$

A = area
C = circumference
V = volume
S = surface area
b = base
h = height
ℓ = length
w = width
r = radius

Right Triangle

$a^2 + b^2 = c^2$

$\sin\theta = \frac{a}{c}$

$\cos\theta = \frac{b}{c}$

$\tan\theta = \frac{a}{b}$



CALCULUS

$$\frac{df}{dx} = \frac{df}{du}\frac{du}{dx}$$

$$\frac{d}{dx}\left(x^n\right) = nx^{n-1}$$

$$\frac{d}{dx}\left(e^x\right) = e^x$$

$$\frac{d}{dx}(\ln x) = \frac{1}{x}$$

$$\frac{d}{dx}(\sin x) = \cos x$$

$$\frac{d}{dx}(\cos x) = -\sin x$$

$$\int x^n\,dx = \frac{1}{n+1}x^{n+1},\ n \neq -1$$

$$\int e^x\,dx = e^x$$

$$\int \frac{dx}{x} = \ln|x|$$

$$\int \cos x\,dx = \sin x$$

$$\int \sin x\,dx = -\cos x$$

PHYSICS C: ELECTRICITY AND MAGNETISM

SECTION II

Time—45 minutes

3 Questions

Directions: Answer all three questions. The suggested time is about 15 minutes for answering each of the questions, which are worth 15 points each. The parts within a question may not have equal weight. Show all your work in the pink booklet in the spaces provided after each part, NOT in this green insert.

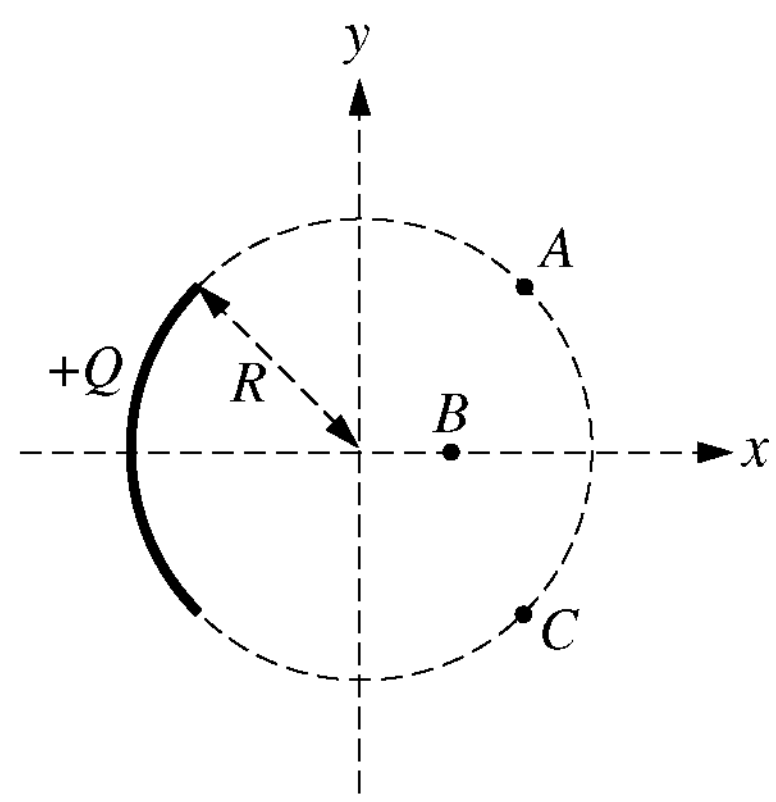

Figure I

E&M. 1.

A charge $+Q$ is uniformly distributed over a quarter circle of radius R, as shown above. Points A, B, and C are located as shown, with A and C located symmetrically relative to the x-axis. Express all algebraic answers in terms of the given quantities and fundamental constants.

(a) Rank the magnitude of the electric potential at points A, B, and C from greatest to least, with number 1 being greatest. If two points have the same potential, give them the same ranking.

____ V_A ____ V_B ____ V_C

Justify your rankings.

Point P is at the origin, as shown below, and is the center of curvature of the charge distribution.

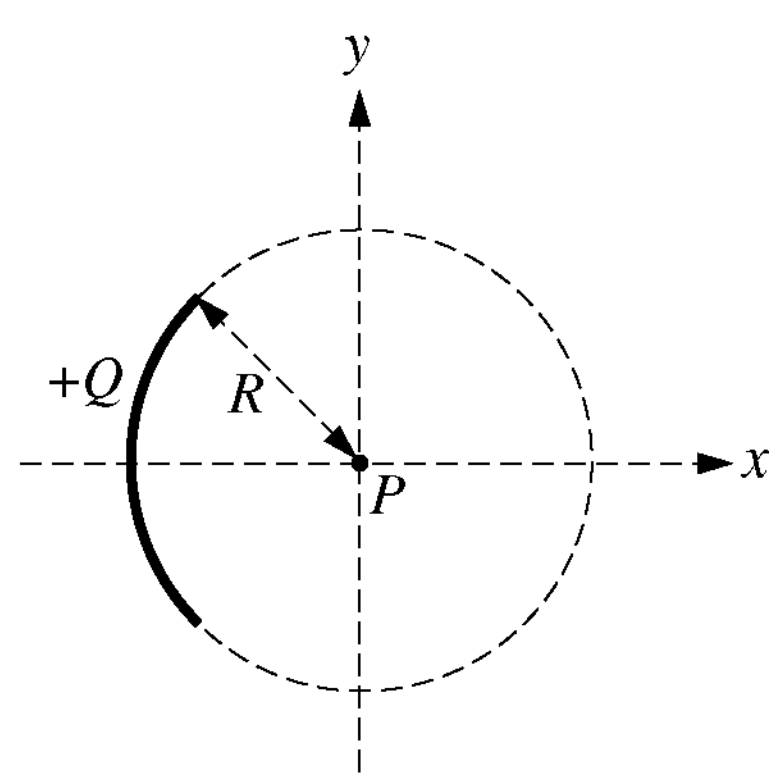

Figure II

(b) Determine an expression for the electric potential at point P due to the charge Q.

(c) A positive point charge q with mass m is placed at point P and released from rest. Derive an expression for the speed of the point charge when it is very far from the origin.

(d) On the dot representing point P below, indicate the direction of the electric field at point P due to the charge Q.



(e) Derive an expression for the magnitude of the electric field at point P.

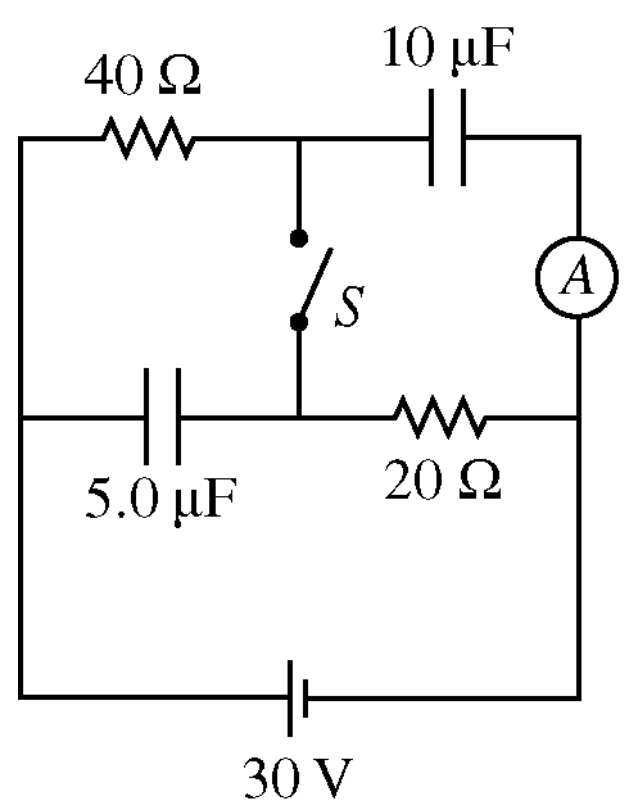

E&M. 2.

In the circuit illustrated above, switch S is initially open and the battery has been connected for a long time.

(a) What is the steady-state current through the ammeter?

(b) Calculate the charge on the 10 μF capacitor.

(c) Calculate the energy stored in the 5.0 μF capacitor.

The switch is now closed, and the circuit comes to a new steady state.

(d) Calculate the steady-state current through the battery.

(e) Calculate the final charge on the 5.0 μF capacitor.

(f) Calculate the energy dissipated as heat in the 40 Ω resistor in one minute once the circuit has reached steady state.

GO ON TO THE NEXT PAGE.

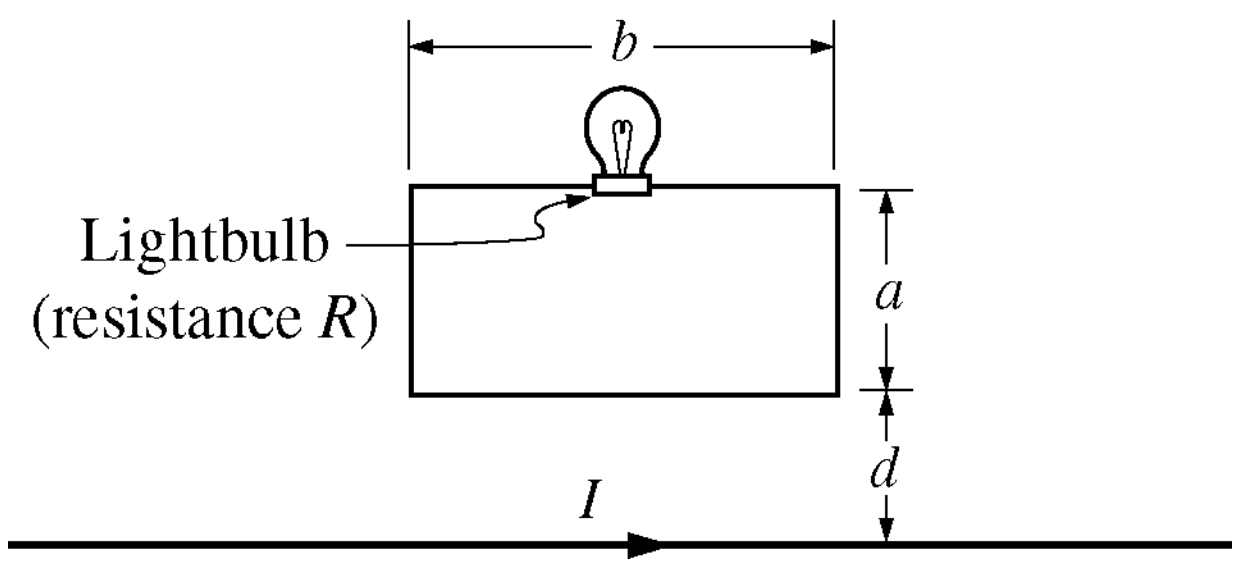

E&M. 3.

The long straight wire illustrated above carries a current I to the right. The current varies with time t according to the equation $I = I_0 - Kt$, where I_0 and K are positive constants and I remains positive throughout the time period of interest. The bottom of a rectangular loop of wire of width b and height a is located a distance d above the long wire, with the long wire in the plane of the loop as shown. A lightbulb with resistance R is connected in the loop. Express all algebraic answers in terms of the given quantities and fundamental constants.

(a) Indicate the direction of the current in the loop.

____Clockwise ____Counterclockwise

Justify your answer.

(b) Indicate whether the lightbulb gets brighter, gets dimmer, or stays the same brightness over the time period of interest.

____Gets brighter ____Gets dimmer ____Remains the same

Justify your answer.

(c) Determine the magnetic field at $t = 0$ due to the current in the long wire at distance r from the long wire.

(d) Derive an expression for the magnetic flux through the loop as a function of time.

(e) Derive an expression for the power dissipated by the lightbulb.

END OF EXAM